

ARCA 304015



Sample image

Order symbol : ARCA 304015

Product nr : 8120022

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the short side

EAN : 6418074079336

El. number :

- Finland : 3423119
- Denmark : 8212091207
- Sweden : 2500111

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

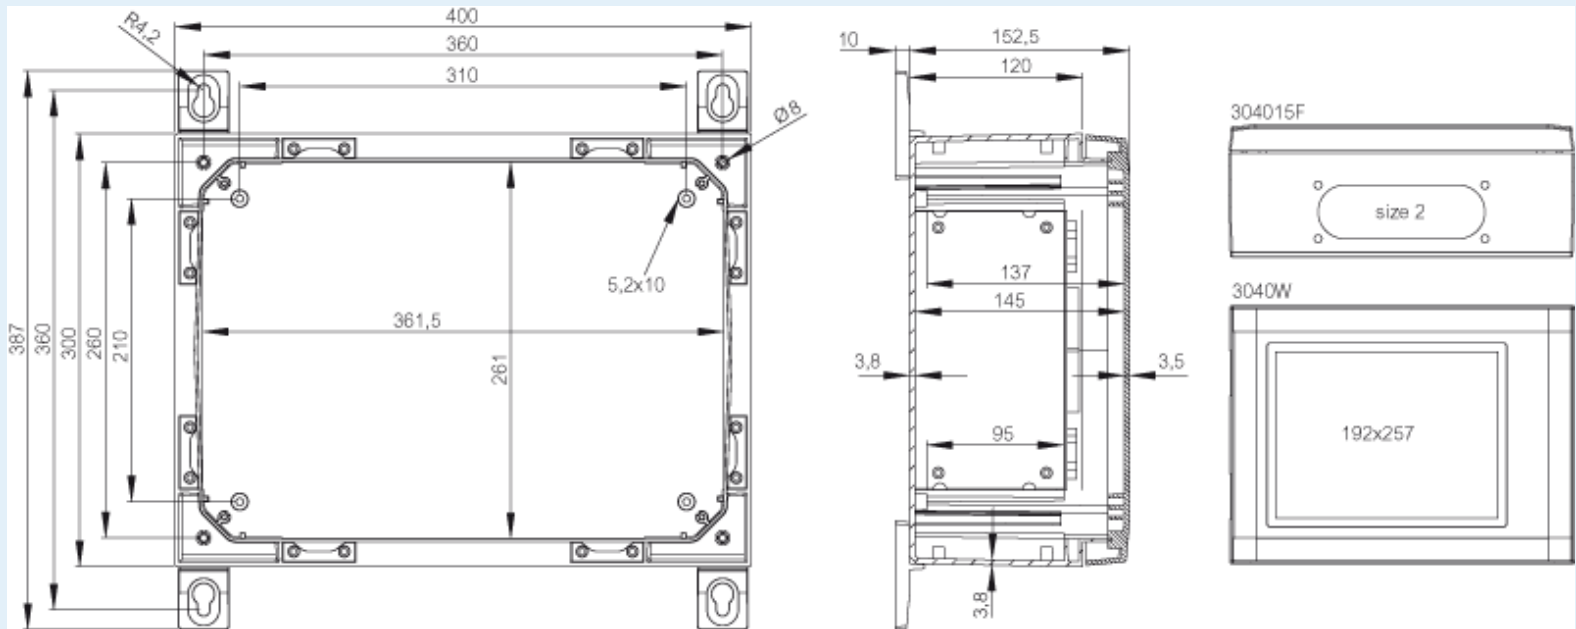

Dimensions :

	Height	Width	Depth
mm :	300	400	150
inch :	11.81	15.75	6.22

Materials :

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey

Accessories :

DRS ARCA 304015	DIN rail frame set (385 x 285 x 35)
SBK ARCA 30	Support bar kit (235 x 40 x 30)
DSP ARCA HRS	Door stopper ARCA, horizontal, right, small
DSP ARCA HLS	Door stopper ARCA, horizontal, left, small
SBK ARCA 40	Support bar kit

Cover colour : RAL 7035 -light grey

Gasket material : Polyurethane

Temperatures :

Temperature °C (short term) : -40 ... 120

Temperature °C (continuous) : -40 ... 80

Temperature °F (short term) : -40 ... 250

Temperature °F (continuous) : -40 ... 175

(340 x 40 x 30)

IDS ARCA 3040 Inner door set
(285 x 385 x 35)

RCS ARCA 3040 Rain canopy set for size 3040
(20 x 400 x 30)

PMK ARCA 40 PoleMounting kit, for pole ø100-300mm
(385 x 285 x 35)

MPP ARCA 3040 Mounting plate perforated (350x250x2 mm -
26x11 mm)
(250 x 350 x 2)

MPMP ARCA 4030 Mounting plate multiperforated (350x250x2
mm - ø3.6 mm)
(350 x 250 x 2)

MPS ARCA 4030 Mounting plate (350x250x2 mm)
(350 x 250 x 2)

MPX ARCA 4030 Mounting plate (350x250 mm)
(350 x 250 x 5)

Rating :

Ingress protection (EN 60529): IP66;

Impact Resistance (EN 62262): IK10;

Electrical insulation : Totally insulated

Halogen free (DIN/VDE 0472, Part 815): 1

UV resistance : UL 508

Flammability Rating : UL 94 5VA

Glow Wire Test (IEC 695-2-1) °C : 960 °C

NEMA Class NEMA 1, 4, 4X, 12 and 13

Certificates :

Certificate FI 40467