

ARCA 405021



Sample image

Order symbol : ARCA 405021

Product nr : 8120025

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the short side

EAN : 6418074079367

El. number :

- Finland : 3423123
- Denmark : 8212091236
- Sweden : 2500115

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

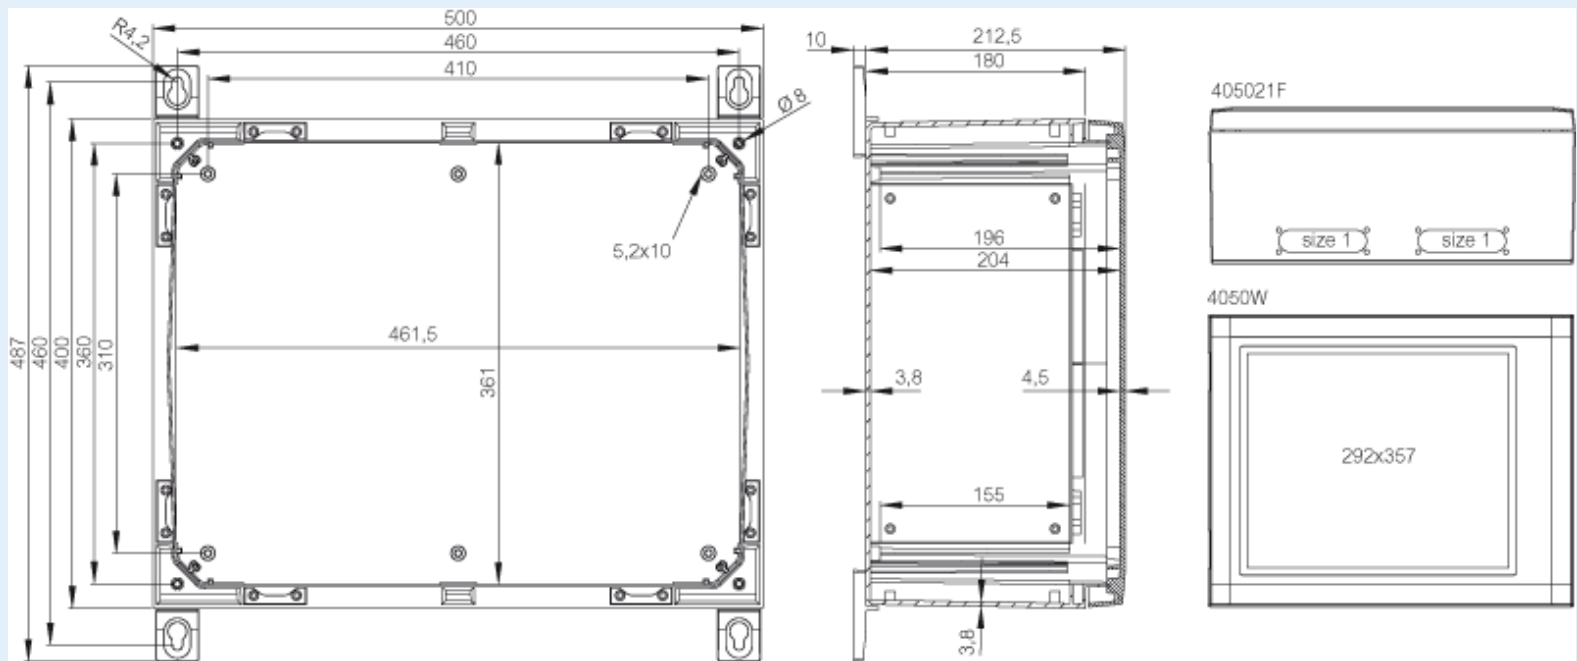

Dimensions :	Height	Width	Depth
mm :	400	500	210
inch :	15.75	19.69	8.58

Materials :

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey

Accessories :

SBK ARCA 50	Support bar kit (435 x 40 x 30)
MPX ARCA 5040	Mounting plate (450x350 mm) (450 x 350 x 5)
MPMP ARCA 5040	Mounting plate multiperforated (450x350x2 mm - ø3.6 mm) (450 x 350 x 2)
DSP ARCA HRS	Door stopper ARCA, horizontal, right, small

Cover colour : RAL 7035 -light grey
Gasket material : Polyurethane

Temperatures :

Temperature °C (short term) : -40 ... 120
Temperature °C (continuous) : -40 ... 80
Temperature °F (short term) : -40 ... 250
Temperature °F (continuous) : -40 ... 175

DRS ARCA 405021	DIN rail frame set (485 x 385 x 35)
DSP ARCA HLS	Door stopper ARCA, horizontal, left, small
SBK ARCA 40	Support bar kit (340 x 40 x 30)
MPP ARCA 4050	Mounting plate perforated (450x350x2 mm - 26x11 mm) (350 x 450 x 2)
MPS ARCA 5040	Mounting plate (450x350x2 mm) (450 x 350 x 2)
PMK ARCA 50	PoleMounting kit, for pole ø100-300mm (485 x 385 x 35)
IDS ARCA 4050	Inner door set (385 x 285 x 35)
RCS ARCA 4050	Rain canopy set for size 4050 (20 x 500 x 30)

Rating :

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
Electrical insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance :	UL 508
Flammability Rating :	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C :	960 °C
NEMA Class	NEMA 1, 4, 4X, 12 and 13

Certificates :

Certificate FI 40467