


**PART NUMBER**

**CS200, CS201**

**COMPONENT SPECIFICATION**

**ISSUE 8**



## Component Specification For Ceramic Hermetically Sealed, Radiation-Hard Transistor Optocouplers

### Features

- Total Ionising Dose Tested to 150 Krad(Si)
- Displacement Damage Tested to 1 MeV x 10<sup>13</sup>
- High Isolation up to 1,500 VDC
- High Current Transfer Ratio
- Low Input Requirements
- Hermetically Sealed
- 6-DIP Package

### Applications

- Space Radiation Equipment
- Military and High-Reliability Systems
- Medical Instruments
- MOS / CMOS Applications
- Logic Interfacing
- Data Transmission
- Power Supplies

## DESCRIPTION

The CS200 series are hermetically sealed, single-channel optically coupled isolators. Each channel is composed of a Gallium Arsenide infrared emitting diode and silicon phototransistor.

These optocouplers are being used in environments encountered in space applications. Package styles for this device include a 6-Pin DIP Package, with surface mount and solder dip options available.

Absolute maximum ratings, recommended operating conditions, electrical specifications and performance characteristics are identical for all units. Any exceptions, due to packaging variations and limitations, are as noted.



*ISOCOM Limited is AS9100 certified for the design and manufacture of electronic and optoelectronic components.*

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR• United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

## STANDARDS

The following specifications have been complied with in the manufacturing of this product -

### Aerospace Compliance Standards

AS9100D & ISO 9001:2015 – Design & Manufacture of Electronic and Optoelectronic Components (*Ref GB15/92780*)

### Military Compliance Specifications

MIL-PRF-38534 – General Specification for Hybrid Microcircuits

MIL-PRF-19500 – General Specification for Discrete Semiconductor Devices

### Military Compliance Standards

MIL-STD-202 – Test Method Standard Electronic and Electrical Component Parts

MIL-STD-883 – Test Method Standard Microcircuits

MIL-STD-750 – Test Method Standard for Semiconductor Devices

## SCREENING INFORMATION

Our products can be screened to MIL-PRF-38534, applying test methods from MIL-STD-883; MIL-PRF-19500, applying test methods of MIL-STD-750; or a combination thereof. Please contact us for more information relating to the applicable screening processes.

## AMENDMENT RECORD

Issue No.	Date	Description
1	August 2013	First Issue.
2	May 2019	Updated Standards Section. Removed Screening, Group testing and Hermetic Sealing Information.
3	January 2021	Updated Formatting and Quality Management Logos. Removed IECQ Logos.
4	May 2022	Added Radiation Testing and Electrical Testing Diagrams, Added Render
5	June 2022	Updated Electrical Test Diagrams and Added Screening Flow
6	June 2023	Updated Marking Image
7	June 2023	Updated Electrical Characteristics
8	August 2023	Added pin configuration, updated screening and updated circuit drawings

For sales enquiries, or further information, please contact our sales office at –


ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR• United Kingdom

Email: [sales@isocom.uk.com](mailto:sales@isocom.uk.com) • Tel: +44 (0)191 416 6546

## PACKAGE STYLES AND CONFIGURATION OPTIONS

Package	6-DIP	
Lead Style	-	
Channels	1	
Common Channel Wiring	-	
Isocom Part Number and Options		
Commercial	CS200	CS201
Defense Screen Level	CS200/L2	CS201/L2
Space Screen Level	CS200/L2S	CS201/L2S
Standard Finish	Gold Plate	
Butt Joint	Option #10	
Solder Dipped	Option #20	
Gull Wing	Option #30	
Butt Joint	Option #60	

## FUNCTIONAL DIAGRAMS

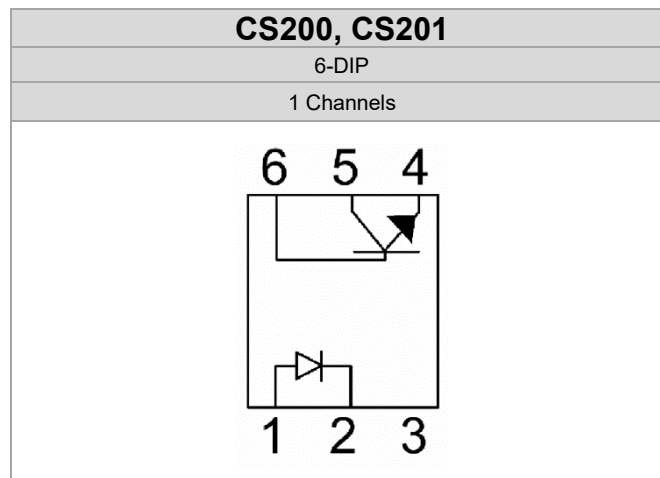

## PIN OUT

Pin number	Function
1	Anode
2	Cathode
3	NC
4	Emitter
5	Collector
6	Base


For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR• United Kingdom


Email: [sales@isocom.uk.com](mailto:sales@isocom.uk.com) • Tel: +44 (0)191 416 6546

## DEVICE MARKING

### FRONT OF DEVICE

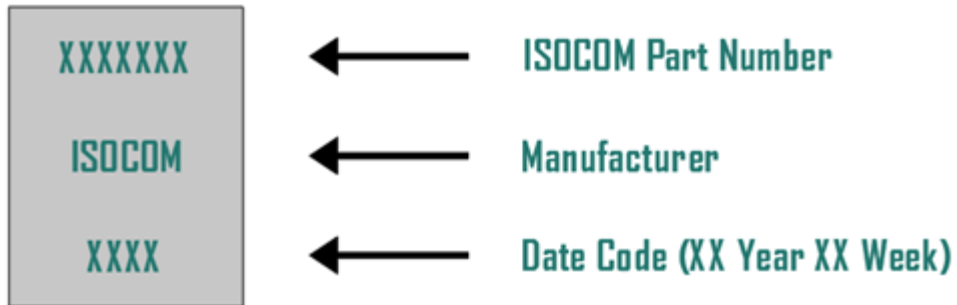

### BACK OF DEVICE

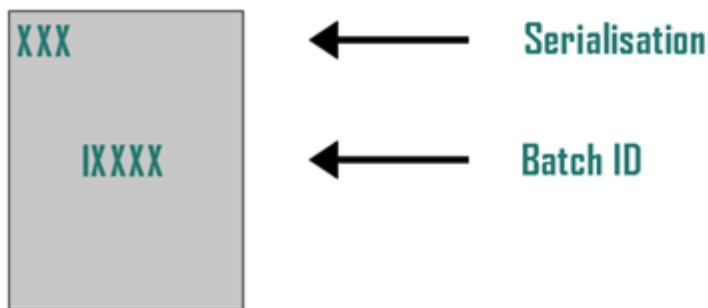

**\*FOR SPACE SCREENED PARTS ONLY\***

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: [sales@isocom.uk.com](mailto:sales@isocom.uk.com) • Tel: +44 (0)191 416 6546

# ABSOLUTE MAXIMUM RATINGS

T<sub>A</sub> = 25°C U.O.S.

Storage Temperature	-65°C to +150°C	
Operating Temperature	-55°C to +125°C	
Lead Soldering Temperature	260°C 1.6mm from case for 10 seconds	
Input-to-Output Isolation Voltage	↑1,500 V <sub>DC</sub>	
<b>Input Diode</b>		
Forward DC Current	50mA	
Reverse DC Voltage	7V	
Peak forward Current	1.5A	≤ 10μs
Power Dissipation	150mW	
<b>Output Transistor</b>		
Collector-Emitter Voltage	70V	
Emitter-Collector Voltage	7V	
Collector-Base Voltage	70V	≤ 10μs
Collector Current	100mA	t = 1ms
Power Dissipation	150mW	Derate linearly above 100°C at 1.4W/°C
<b>Coupled Device</b>		
Power Dissipation	360mW	
Soldering Temperature, Soldering Iron	260.5°C	This part shall not be re-soldered until 3 minutes have elapsed.
Soldering Temperature, Vapour Phase	220.40°C	This part shall not be re-soldered until 3 minutes have elapsed.
ESD Classification	Class 2	Class 2 with minimum critical path voltage of 4,000 to 15,999V. MIL-STD-883

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

# ELECTRICAL CHARACTERISTICS

T<sub>A</sub> = -55°C - 125°C U.O.S.

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
<b>Input Diode Electrical Characteristics</b>						
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10mA	0.7	1.2	1.8	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> = 3.0V	-	-	100	µA
<b>Output Detector Electrical Characteristics</b>						
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = 0.1mA	70	100	-	V
Collector-Base Breakdown Voltage	V <sub>(BR)CBO</sub>	I <sub>B</sub> = 100µA	70	200	-	V
Emitter-Collector Breakdown Voltage	V <sub>(BR)ECO</sub>	I <sub>E</sub> = 0.1mA	7	9	-	V
Emitter-Base Breakdown Voltage	V <sub>(BR)EBO</sub>	I <sub>B</sub> = 1mA	5	-	-	V
Collector-Emitter Leakage Current	I <sub>CEO</sub>	V <sub>CE</sub> = 20V, I <sub>F</sub> = 0A	-	7	100	µA
<b>Coupled Electrical Characteristics</b>						
DC Current Transfer Ratio (Pre-Radiation)	I <sub>C</sub> /I <sub>F</sub>	I <sub>F</sub> = 1.0mA, V <sub>CE</sub> = 1V	200	-	-	%
		I <sub>F</sub> = 3.0mA, V <sub>CE</sub> = 1V	200	-	-	%
		I <sub>F</sub> = 15.0mA, V <sub>CE</sub> = 1V	100	-	-	%
		I <sub>F</sub> = 10.0mA, V <sub>CE</sub> = 5V	350	-	-	%
		I <sub>F</sub> = 15.0mA, V <sub>CE</sub> = 5V	100	-	-	%
		I <sub>F</sub> = 1.0mA, V <sub>CE</sub> = 15V	300	-	-	%
Collector-Emitter Saturation Voltage	V <sub>CE(Sat)</sub>	I <sub>C</sub> = 10.0 mA I <sub>F</sub> = 20 mA	-	-	0.22	V
Isolation Voltage <sup>(1)</sup>	V in-out	T = 5s	1,500	-	-	V <sub>DC</sub>
Input to Output Resistance <sup>(1)</sup>	R in-out	V <sub>IO</sub> = 500V	-	10 <sup>11</sup>	-	Ω
Rise Time	t <sub>r</sub>	R <sub>L</sub> = 100Ω, V <sub>CC</sub> = 10V, I <sub>F</sub> = 10mA	-	6	12	µs
Fall Time	t <sub>f</sub>	R <sub>L</sub> = 100Ω, V <sub>CC</sub> = 10V, I <sub>F</sub> = 10mA	-	6	12	µs
Propagation Delay – H-L	t <sub>PHL</sub>	R <sub>L</sub> = 100Ω, V <sub>CC</sub> = 10V, I <sub>F</sub> = 10mA	-	-	5.0	µs
Propagation Delay – L-H	t <sub>PLH</sub>	R <sub>L</sub> = 100Ω, V <sub>CC</sub> = 10V, I <sub>F</sub> = 10mA	-	-	5.0	µs
DC Current Transfer Ratio (Post-Radiation)	I <sub>C</sub> /I <sub>F</sub>	I <sub>F</sub> = 1.0mA, V <sub>CE</sub> = 1V	200	-	-	%
		I <sub>F</sub> = 3.0mA, V <sub>CE</sub> = 1V	100	-	-	%
		I <sub>F</sub> = 15.0mA, V <sub>CE</sub> = 1V	66	-	-	%
		I <sub>F</sub> = 10.0mA, V <sub>CE</sub> = 5V	160	-	-	%
		I <sub>F</sub> = 15.0mA, V <sub>CE</sub> = 5V	40	-	-	%
		I <sub>F</sub> = 1.0mA, V <sub>CE</sub> = 15V	250	-	-	%

**Notes:**

1. Measurements with inputs shorted together and outputs shorted together.

For sales enquiries, or further information, please contact our sales office at –


ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546


## ELECTRICAL CHARACTERISTICS

Typical Graphs – Contact Office for more information


$V_{CE} = 1, 3, 5, 7, 10, 12$  and  $15V$

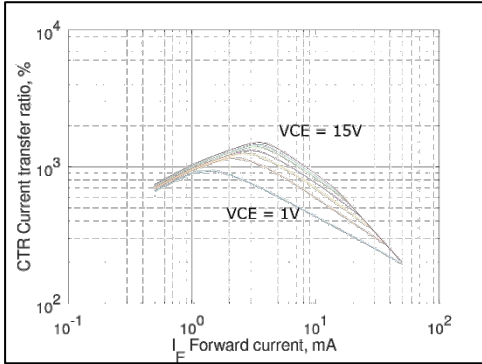


$V_F$  vs  $I_F$

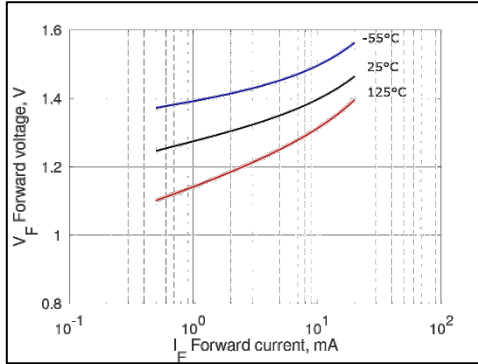


CTR vs  $I_F$ :  $V_{CE} = 5V$   $T_A = 25^\circ C$

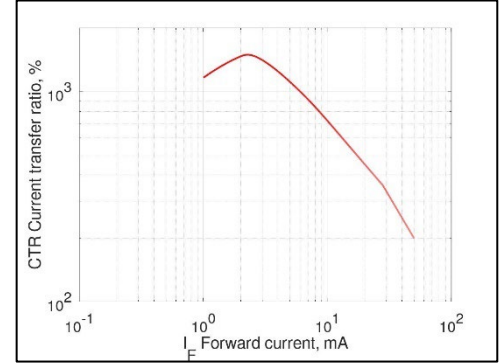


$I_{ce0}$  vs  $T_A$ :  $V_{CE} = 20V$

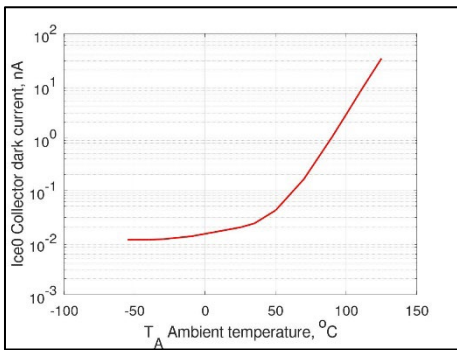


CTR vs  $T_A$ :  $I_F = 10mA$   $V_{CE} = 5V$

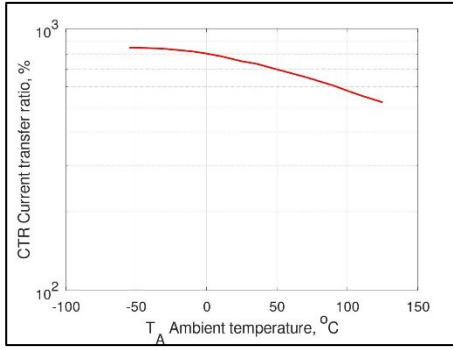

$V_{CE(sat)}$  vs  $T_A$ :  $I_F = 20mA$   $I_C = 10mA$

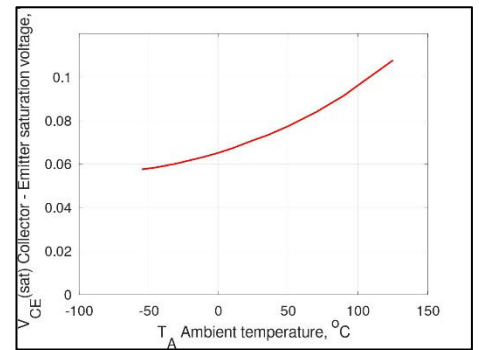

$I_C$  vs  $V_{CE}$ :  $T_A = 25^\circ C$

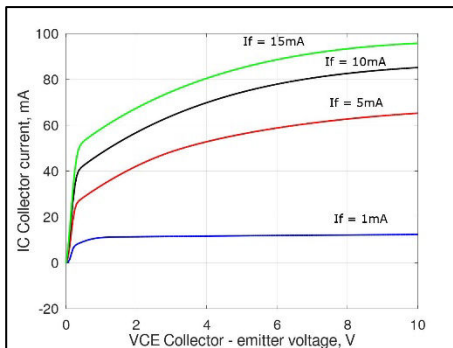


For sales enquiries, or further information, please contact our sales office at –


ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: [sales@isocom.uk.com](mailto:sales@isocom.uk.com) • Tel: +44 (0)191 416 6546

## HTRB TEST CIRCUIT

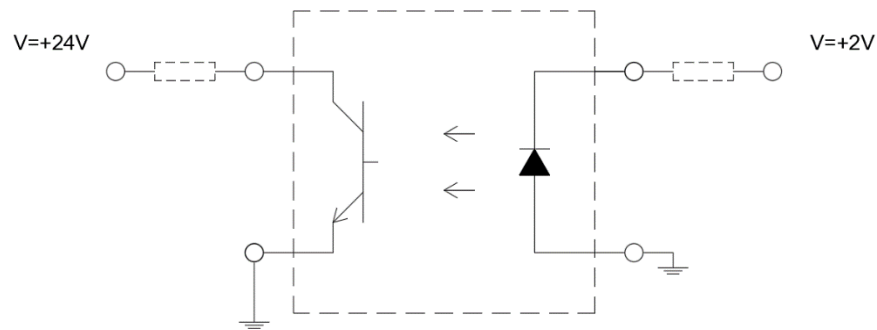

## Electrical Circuit for Burn-in and Operating Life Tests

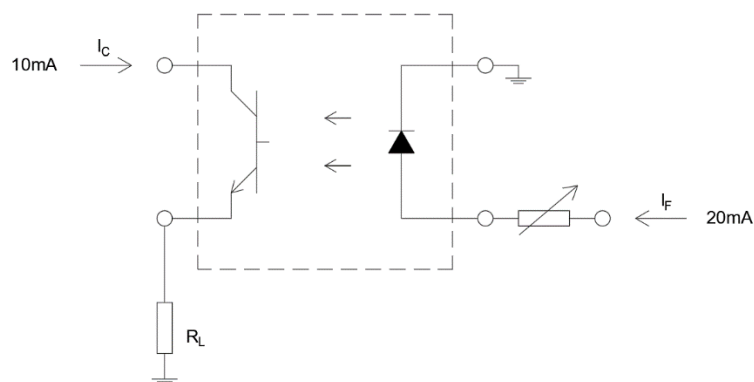


## Electrical measurement of Collector Current

For sales enquiries, or further information, please contact our sales office at –


ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546




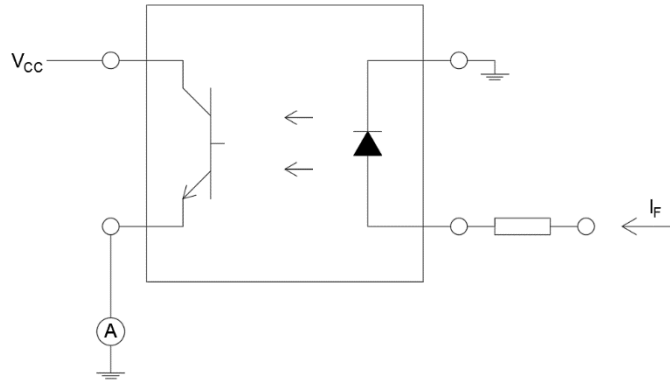

## Electrical measurement of Collector Emitter Saturation Voltage

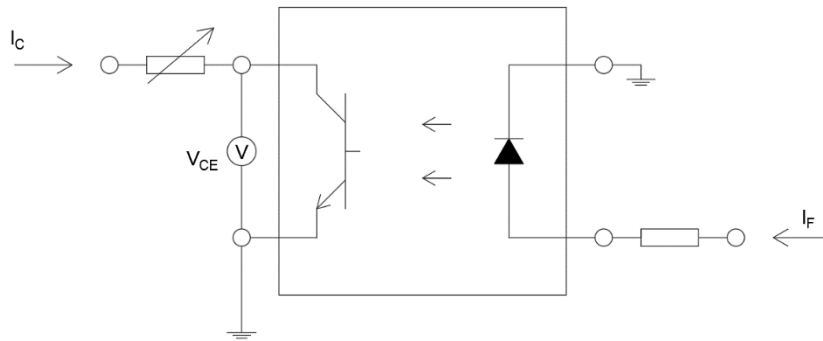

## Electrical measurement of A.C Parameters

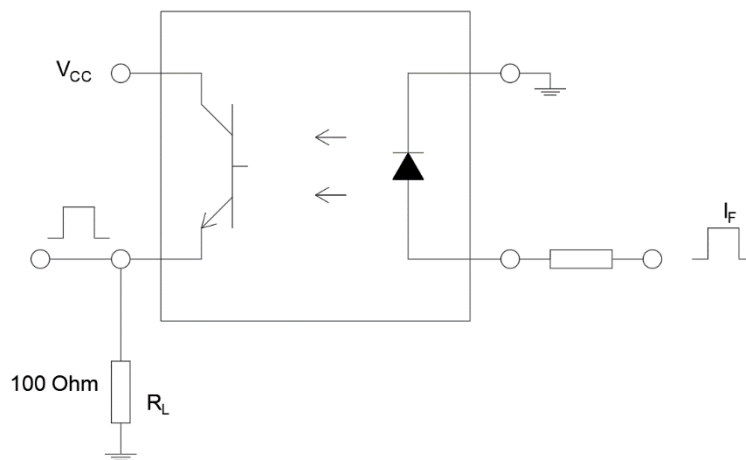

## Switching Time

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • S67 8RR • United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6346

Input waveform is supplied by a generator with the following



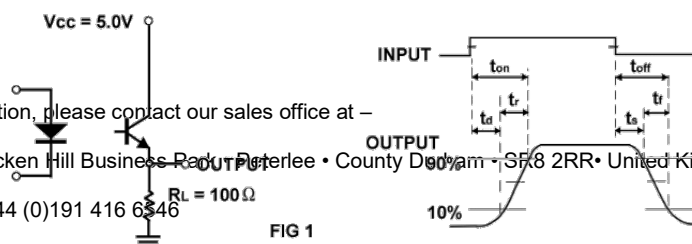


FIG 1

## RADIATION TESTING

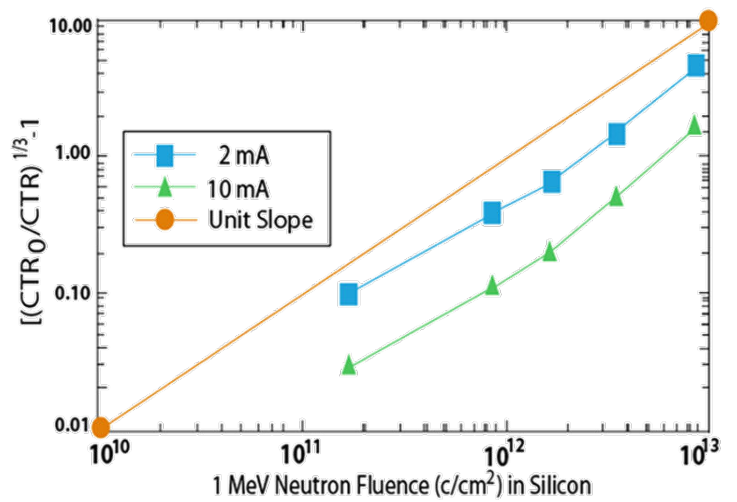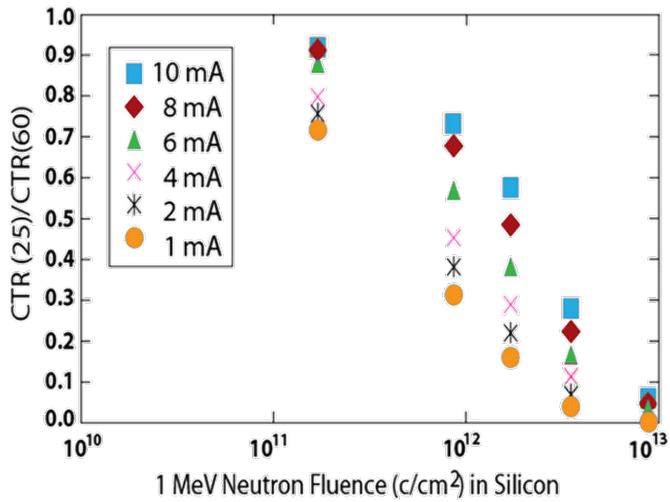


For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

## OUTLINE DRAWING

### 6-Pin DIP



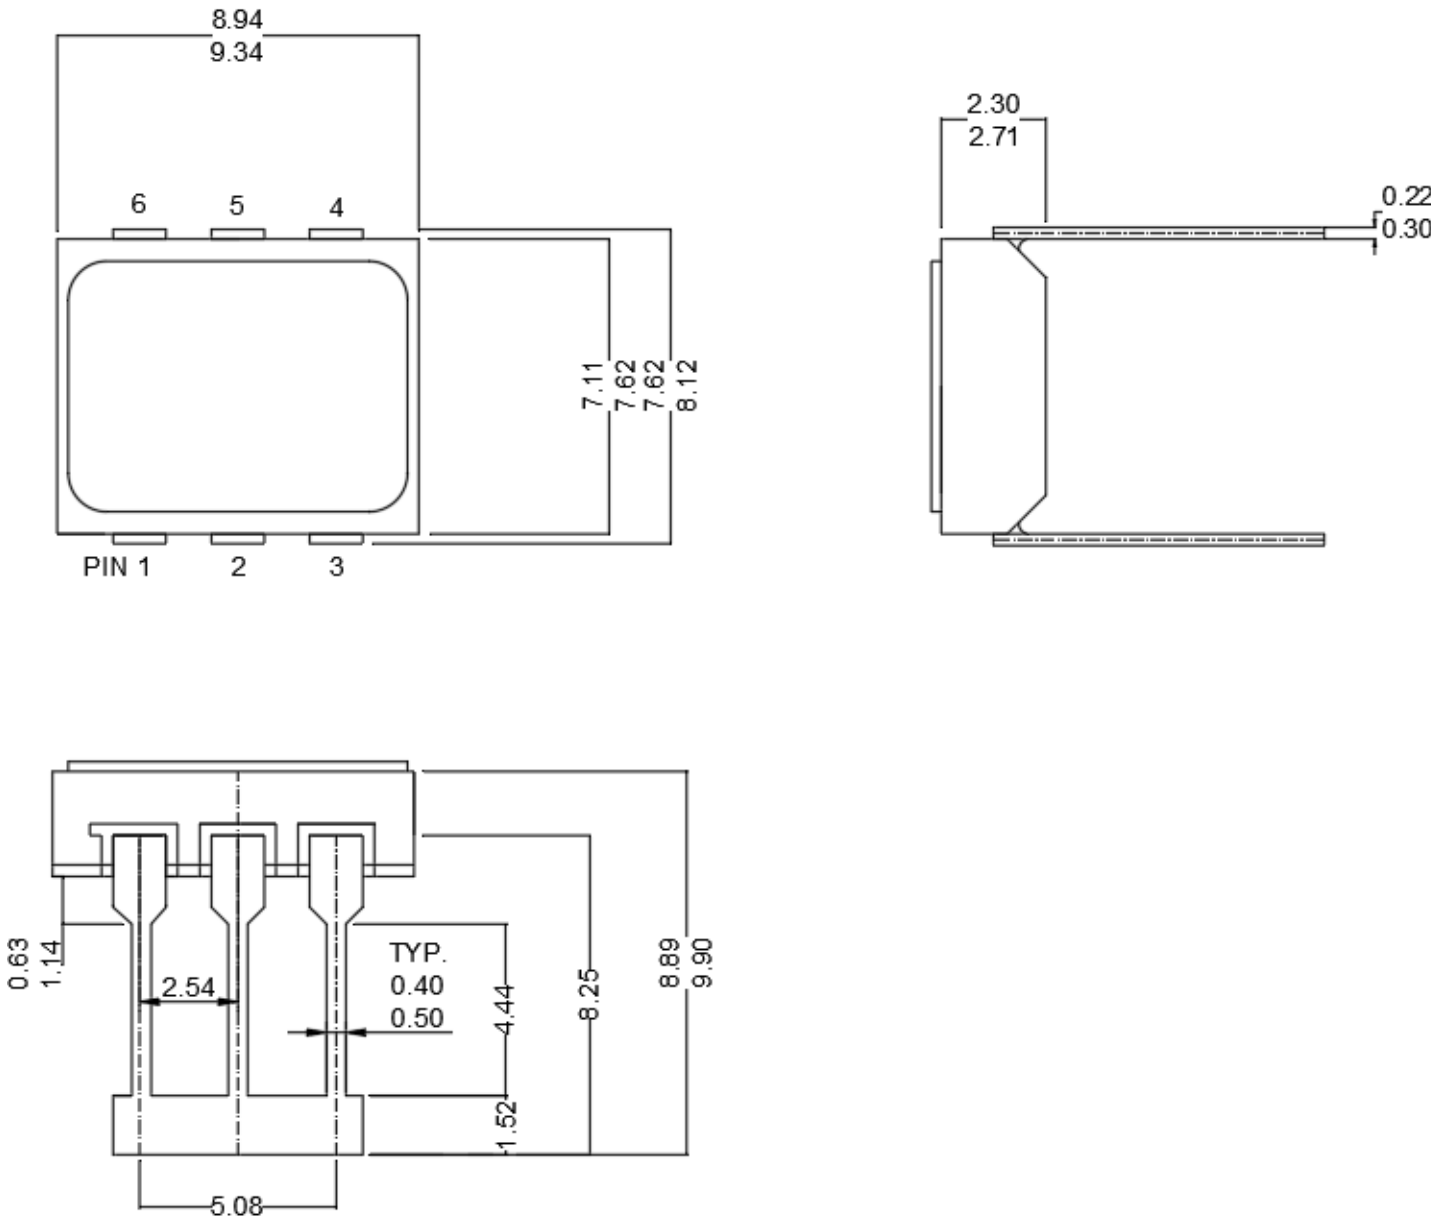


For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

## HERMETIC OPTOCOUPLER OPTIONS

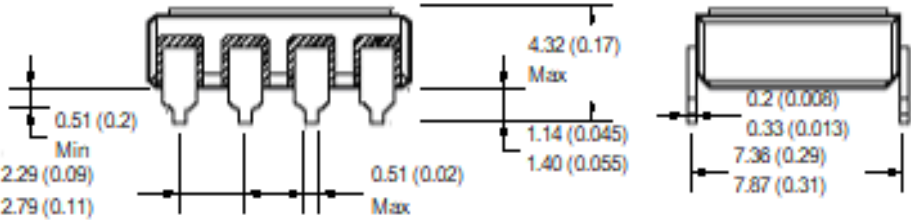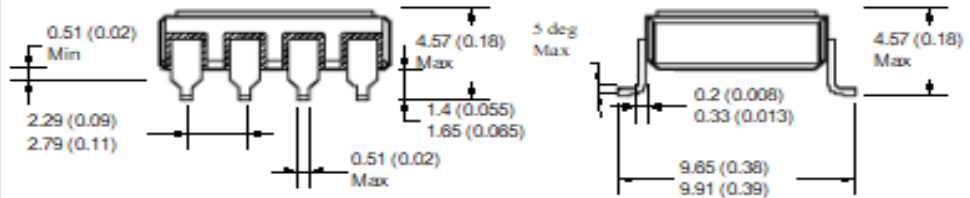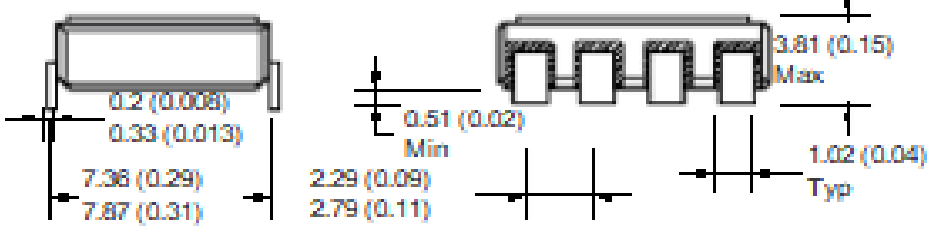
Option	Description
<p><b>Option #10</b></p>	<p>Surface mountable hermetic optocoupler with leads trimmed for butt joint assembly. This option is available in commercial hi-rel products in 6-Pin DIP.</p> 
<p><b>Option #20</b></p>	<p>Solder Dipped.</p>
<p><b>Option #30</b></p>	<p>Surface mountable hermetic optocoupler with leads cut and bent for gull wing assembly. This option is available in commercial and hi-rel products in 6-Pin DIP.</p> 
<p><b>Option #60</b></p>	<p>Surface mountable hermetic optocoupler with leads trimmed for butt joint assembly. This option is available in commercial hi-rel products in 6-Pin DIP.</p> 

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: [sales@isocom.uk.com](mailto:sales@isocom.uk.com) • Tel: +44 (0)191 416 6546

## SCREENING IN ACCORDANCE WITH MIL-PRF 38534

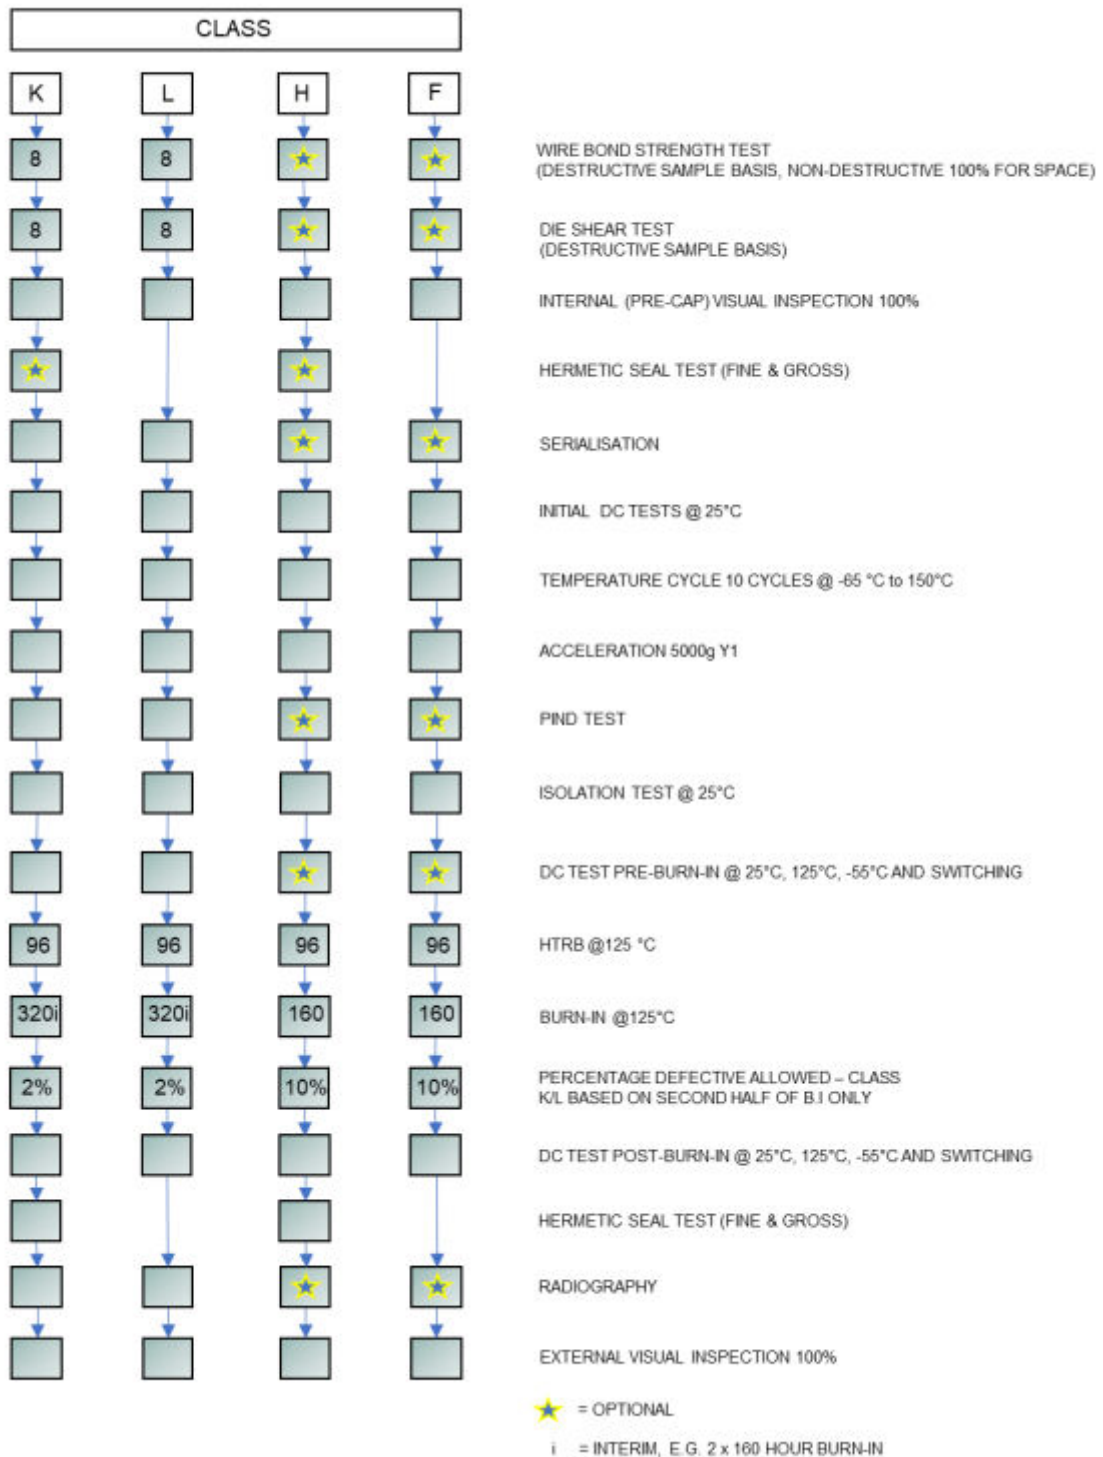

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR• United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

The following screening flow includes the electrical tests between each screening step, the referenced test method from MIL-STD 883 and the sample basis for Class K/L and H/F quality levels.


Operation No.	Operation	MIL-STD 883 TEST METHOD	Class	
			H/F (L2)	K/L (L2S)
1	Wire bond strength (ND)	(883) 2023	Optional	100%
2	Wire bond strength (D)	(883) 2011	Optional	8 devices
3	Die Shear	(883) 2019	Optional	8 devices
4	Internal Visual	(883) 2017	100%	100%
5	Fine leak, Helium bomb, Leak detector	(883) 1014, Con A1	Optional	Optional
6	Gross leak, Liquid bomb, -Bubble chamber	(883) 1014, Con C1	Optional	Optional
7	Serialisation of devices		Optional	100%
8	Electrical Test 25°C		100%	100%
9	Temp cycle @ -65°C to 150°C	(883) 1010, Con C, 10 cycles	100%	100%
10	Electrical Test 25°C		100%	100%
11	Constant acceleration	(883) 2001, 3000g, Y1	100%	100%
12	Electrical Test 25°C		100%	100%
13	P.I.N.D	(883) 2020, Con A	Optional	100%
14	Electrical Test 25°C		100%	100%
15	Isolation 100% @ 25°C	(MIL-STD 202) 301	100%	100%
16	Electrical Test 25°C		100%	100%
17	Electrical Test 125°C		Optional	100%
18	Electrical Test -55°C		Optional	100%
19	Switching time 100% @ 25°C		Optional	100%
20	HTRB @ 125°C - 96 hrs	(883) 1015, con A	100%	100%
21	Electrical Test 25°C		100%	100%
22	Burn in @ 125°C	(883) 1015, con B	100% 160 hours	100% 160 hrs
23	Electrical Test 25°C		100%	100%
24	Burn in @ 125°C	(883) 1015, con B	N/A	100% 160 hrs
25	Percentage defective allowable	Pre/post Burn-in electrical and delta at 25°C only	Max. 10%	Max. 2%
26	Electrical Test 25°C	Group A - SG1	100%	100%
27	Electrical Test 125°C	Group A - SG2	100%	100%
28	Electrical Test -55°C	Group A - SG3	100%	100%
29	Switching time 100% @ 25°C	Group A - SG9	100%	100%
30	Fine leak, Helium bomb, Leak detector	(883) 1014, Con A1	100%	100%
31	Gross leak, Liquid bomb, -Bubble chamber	(883) 1014, Con C1	100%	100%
32	Radiography	(883) 2012	Optional	100%
33	External Visual	(883) 2009	100%	100%

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR• United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

## SCREENING IN ACCORDANCE WITH MIL-PRF 19500

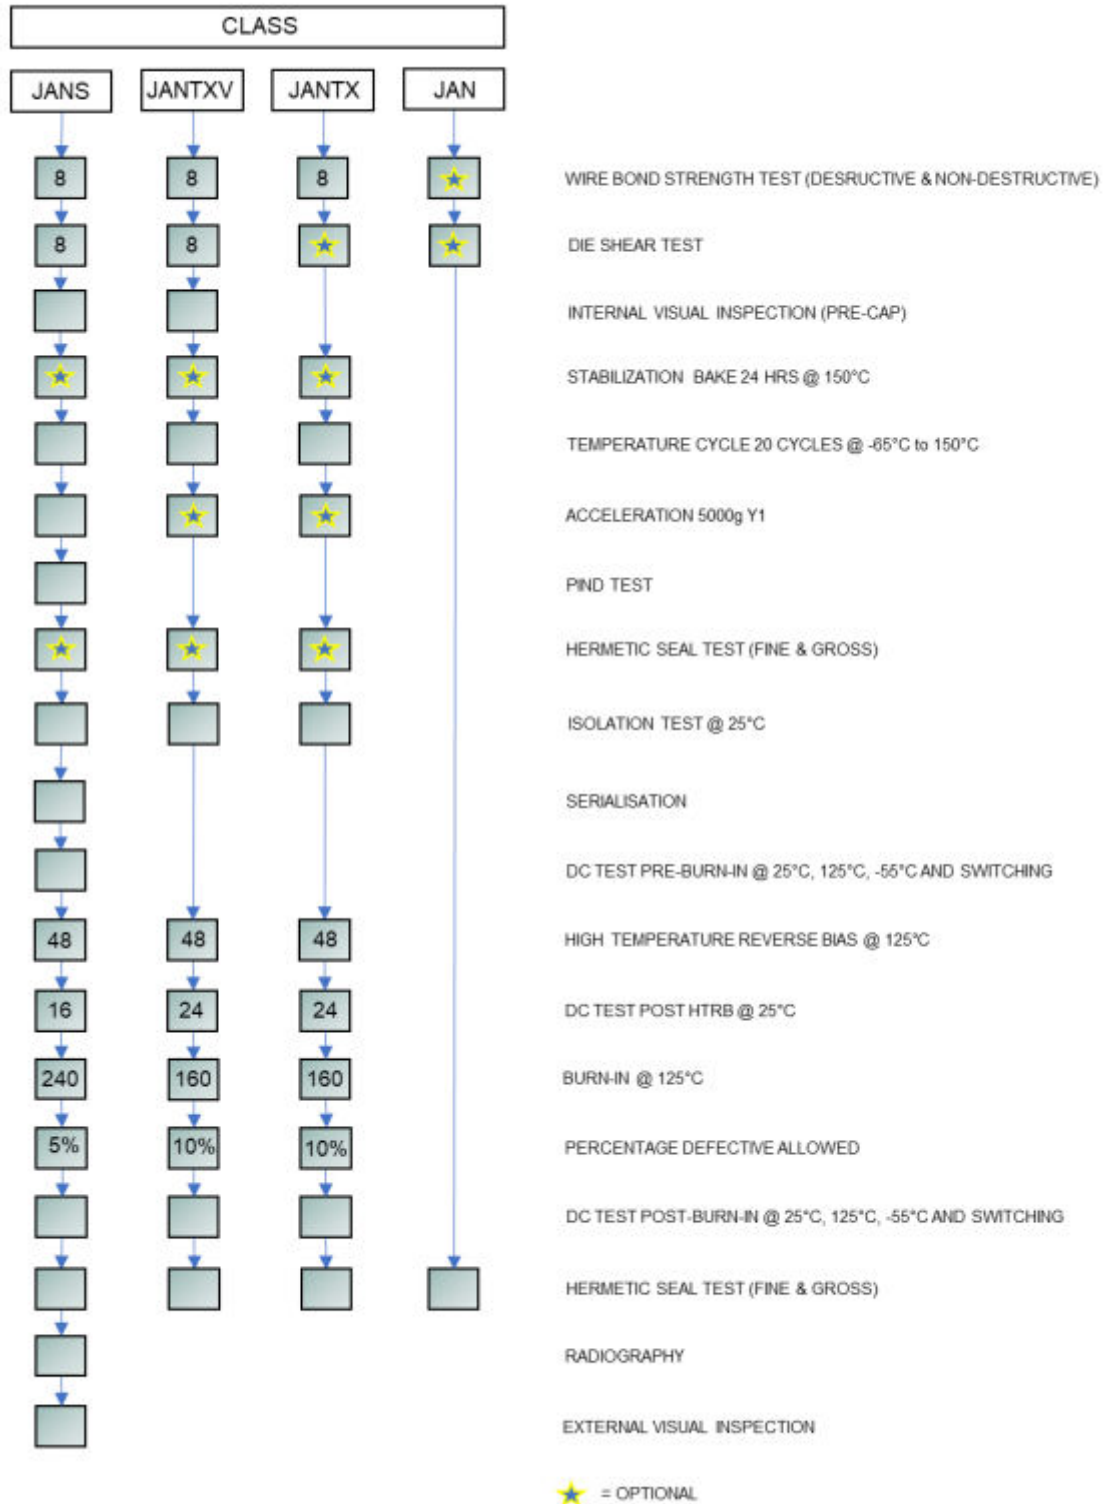

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR• United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

The following screening flow includes the electrical tests between each screening step, the referenced test method from MIL-STD 750 and the sample basis for Class JANTX, JANTXV and JANS quality levels.

Operation No.	Operation	MIL-PRF 19500	Class		
			JANTX (L2)	JANTXV (L2)	JANS (L2B)
1	Wire bond strength (ND)	(883) 2023	100%	100%	100%
2	Wire bond strength (D)	(750) 2037, Con D	4 devices	4 devices	8 devices
3	Die Shear	(750) 2017	4 devices	4 devices	8 devices
4	Internal Visual	(750) 2072	Optional	100%	100%
5	Stabilization Bake		Optional	Optional	Optional
6	Electrical Test @ 25°C		100%	100%	100%
7	Temp cycle (20 cycles @ -65°C to 150°C)	(750) 1051, Con F	100%	100%	100%
8	Electrical Test @ 25°C		100%	100%	100%
9	Constant acceleration	(750) 2006, 5000g, Y1	Optional	Optional	100%
10	Electrical Test @ 25°C		100%	100%	100%
11	P.I.N.D	(750) 2052, Con A	N/A	N/A	100%
12	Electrical Test @ 25°C		N/A	N/A	100%
13	Fine leak, Helium bomb, -Leak detector	(750) 1071 Con H1	Optional	Optional	Optional
14	Gross leak, Liquid bomb, Bubble chamber	(750) 1071, Con C	Optional	Optional	Optional
15	Serialisation of devices		N/A	N/A	100%
16	Isolation 100% @ 25°C	(MIL-STD 202) 301	100%	100%	100%
17	Electrical Test @ 25°C		100%	100%	100%
18	Electrical Test @ 125°C		100%	100%	100%
19	Electrical Test @ -55°C		100%	100%	100%
20	Switching time @ 25°C		100%	100%	100%
21	HTRB (125°C)	(750) 1039, Con A (80% VDS)	100% (48 hrs)	100% (48 hrs)	100% (48 hrs)
22	Electrical Test @ 25°C		100% (24 hrs)	100% (24 hrs)	100% (16 hrs)
23	Burn-In (125°C)	(750) 1039, Con B (80% VDS)	100% (160 hrs)	100% (160 hrs)	100% (240 hrs)
24	Percentage defective allowable	Pre/post Burn-in electrical and delta at 25°C only	100% @ 10% PDA	100% @ 10% PDA	100% @ 5% PDA
25	Electrical Test @ 25°C		100% (Group A, SG 2)	100% (Group A, SG 2)	100% (Group A, SG 2)
26	Electrical Test @ 125°C		100% (Group A, SG 3)	100% (Group A, SG 3)	100% (Group A, SG 3)
27	Electrical Test @ -55°C		100% (Group A, SG 3)	100% (Group A, SG 3)	100% (Group A, SG 3)
28	Switching time @ 25°C		100% (Group A, SG4)	100% (Group A, SG4)	100% (Group A, SG4)
29	Fine leak, Helium bomb, -Leak detector	(750) 1071 Con H1	100%	100%	100%
30	Gross leak, Liquid bomb, Bubble chamber	(750) 1071, Con C	100%	100%	100%
31	Radiography	(750) 2076	N/A	N/A	100%
32	External Visual	(750) 2071	N/A	N/A	100%

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR• United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546



## MIL-PRF 19500 TYPICAL QCI TESTING PROCESS FLOW

Group	Sub Group	Parameters	TM	Quantity (accept number)			
				JANS	JANTX, JANTXV		
A (CI)	1	Visual and mechanical inspection	750-2071	100%	100%		
	2	Static tests at +25°C	Datasheet				
	3	Static tests at min and max. rated operating temp.	Datasheet				
	4	Dynamic test at +25°C	Datasheet				
		(JANS)		Large LOT (accept)	Small LOT (accept)		
B (PI)	1	Physical dimension	750-2066	22 (0)	8 (0)		
	2	Solderability	750-2026	15 leads (0)	6 leads (0)		
	3	Temperature cycling (100 cycles)	750-1051	22 (0)	6 (0)		
		Hermetic seal (fine and gross leak)	750-1071				
		Electrical measurements	GRP-A-SG2				
		Decap internal visual	750-2075				
		Bond strength	750-2037			22 wires (0) or 11 (0)	12 wires (0) or 6 (0)
		SEM	750-2077			11 (0)	6 (0)
	4	Die shear	750-2017	11 (0)	6 (0)		
		Intermittent operation life (2000 cycles)	750-1037				
		(JANTXV, JANTX)		Large LOT (accept)	Small LOT (accept)		
B (PI)	1	Solderability	750-2026	15 leads (0)	4 leads (0)		
	2	Temperature cycling (45 cycles incl. screening)	750-1051	22 (0)	6 (0)		
		Hermetic Seal (fine and gross leak)	750-1071				
		Electrical measurements	GRP-A-SG2				
	3	Steady state op. life (340 Hrs) or intermittent op. life (2000 cycles)	750-1026 or 750-1037	45 (0)	12 (0)		
		Electrical measurements	GRP-A-SG2				
4	Decap internal visual	750-2075	1 (0)	1 (0)			

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

**MIL-PRF 19500 TYPICAL QCI TESTING  
PROCESS FLOW**

Group	Sub Group	Parameters	TM	Sample plan	Small LOT (accept)
C (PI)	1	Physical dimensions (Not Req. JANS)	750-2066	15 (0)	6 (0)
	2	Thermal shock (25 cycles, con B)	750-1056	22 (0)	6 (0)
		Temperature cycling (45 cycles incl. screening)	750-1051		
		Terminal strength	750-2036		
		Hermetic seal (fine and gross leak)	750-1071		
		Electrical measurements	GRP-A-SG2		
	3	Constant acceleration (5000g, Y1 only)	750-2006	22 (0)	6 (0)
		Electrical measurements	GRP-A-SG2		
	6	Steady state op. life (1000 Hrs) or intermittent op. life (6000 cycles)	750-1026 or 750-1037	22 (0)	12 (0)
		Electrical measurements	GRP-A-SG2		
7	Internal Gas Analysis - Moisture 10,000 ppmv limit	750-1018	3 (0)	3 (0)	

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR• United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

## MIL-PRF 38534 TYPICAL QCI TESTING PROCESS FLOW

Group	Sub Group	Parameters	Quantity (accept number)		
			TM	K	H
A (CI)	1	Static tests at +25°C	Datasheet	100%	100%
	2	Static tests at max. rated operating temp.	Datasheet	100%	100%
	3	Static tests at min. rated operating temp.	Datasheet	100%	100%
	9	Switching tests at +25°C	Datasheet	100%	100%
B (PI)	1	Physical dimension	883-2016	2 (0)	2 (0)
	4	Internal visual and mechanical	883-2014	1 (0)	1 (0)
	5	Bond strength: Ultrasonic (on hotplate)	883-2011	2 (0)	2 (0)
	6	Die shear strength	883-2019	2 (0)	2 (0)
	7	Solderability	883-2003	1 (0)	1 (0)
	8	Seal: a. Fine, b. Gross	883-1014	N/A	15 (0)
C (PI)	1	External visual	883-2009	5 (0)	5 (0)
		Temperature Cycling	883-1010	5 (0)	5 (0)
		Constant acceleration	883-2001	X	5 (0)
		Seal (fine and gross)	883-1014	5 (0)	5 (0)
		PIND	883-2020	5 (0)	5 (0)
		Visual examination	883-1010	5 (0)	5 (0)
	2	End-point electrical	GRP-A	5 (0)	5 (0)
		Steady-state life test	883-1005	22 (0) or 5 (0)	22 (0) or 5 (0)
		End-point electrical	GRP-A	22 (0) or 5 (0)	22 (0) or 5 (0)
3	Internal gas analysis Moisture 10,000 ppmv limit	883-1018	3 (0) or 5 (1)	3 (0) or 5 (1)	
D (PI)	1	Thermal shock	883-1011	5 (0)	5 (0)
		Stabilization bake	883-1008	5 (0)	5 (0)
		Lead integrity	883-2004	1 (0)	1 (0)
		Seal: a. Fine, b. Gross	883-1014	5 (0)	5 (0)

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: sales@isocom.uk.com • Tel: +44 (0)191 416 6546

Summary of key differences between MIL-PRF 19500 and MIL-PRF 38534 for space level testing:

	MIL-PRF 19500 - JANS	MIL-PRF 38534 – Class K
No. of Operation (Screening) Steps	31	33
Optional Hermeticity Testing	Occurs post P.I.N.D	Occurs post Internal Visual
Temp cycle – No. of Temp Cycles	20	10
Acceleration - Amount of g force	5000g	3000g
HTRB – No. of hours	48	96
Burn-in – No. of hours	240 hrs in one successive burn-in	320 hrs (2 x 160 hrs with interim electrical)
PDA post burn-in	5% after 240 hrs burn-in	2% after second 160 hrs burn-in

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR• United Kingdom

Email: [sales@isocom.uk.com](mailto:sales@isocom.uk.com) • Tel: +44 (0)191 416 6546

## DISCLAIMER

The information provided on the datasheet is for preliminary and general information only. We do not warrant that the information contained on the datasheet is suitable for your intended use, nor do we accept responsibility for loss suffered as a result of reliance by you upon the accuracy or currency of information contained on the datasheet. In particular, you should not make any investment or commercial decision on the basis of the information contained on the datasheet. You should obtain independent professional advice and make your own further enquiries before making any investment or commercial decision or taking any further action in any way related to the information contained on the datasheet.

We are not aware of any inaccuracy in the information contained on the datasheet. However, we do not warrant the accuracy, adequacy or completeness of such information.

We reserve the right to remove or alter any of the information contained on the datasheet at any time. However, we do not guarantee the currency of the information contained on the datasheet, nor do we undertake to keep the datasheet updated.

ISOCOM Limited  
2 Fern Court  
Bracken Hill Business Park  
Peterlee  
County Durham  
SR8 2RR  
United Kingdom

W – [www.isocom.uk.com](http://www.isocom.uk.com)  
E – [sales@isocom.uk.com](mailto:sales@isocom.uk.com)  
T - +44 (0) 191 416 6546



*ISOCOM Limited is AS9100 certified for the design and manufacture of electronic and optoelectronic components.*

For sales enquiries, or further information, please contact our sales office at –

ISOCOM Limited • 2 Fern Court • Bracken Hill Business Park • Peterlee • County Durham • SR8 2RR • United Kingdom

Email: [sales@isocom.uk.com](mailto:sales@isocom.uk.com) • Tel: +44 (0)191 416 6546