




ISO9001:2008 Certified

**Mechanical Specifications (mm)**

D:	36.0	± Max
T:	9.0	± Max
Lead Diameter		±
S:	19.0	± Nom
L:	22.0	± Nom
Coating Lead Run Down (straight Leads)	6.0	± Max
B:	5.50	± Nom
C:	0.50	± Nom

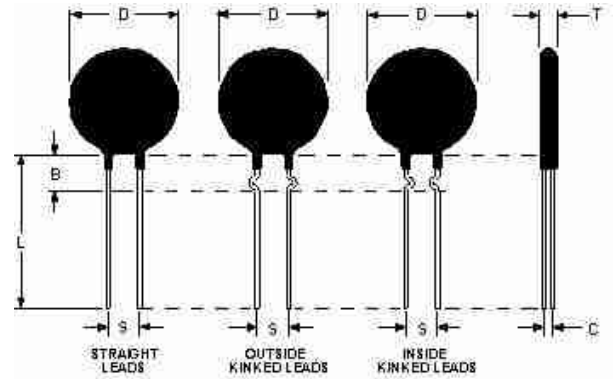

**Electrical Specifications**

Resistance:	20.0 Ω	± 25 %
Max Steady State Current upto 65°C:	10.00	A
Max Rec. Energy Rating:	500	J
Actual Failure Instantaneous Energy:	1000	J
Resistance @ 100% Max Current:	0.00	Ω
Resistance @ 50% Max Current:	0.38	Ω
Body Temperature at 100% Max Current:	210.00	°c
Dissipation Constant:	78.2	mw/°c
Thermal Time Constant:	55	Sec.
Material Type (for Beta and Curve):	G	

<b>AS35 20010</b>	
Date: 03/15/2011	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A