



ISO9001:2008 Certified

**Mechanical Specifications (mm)**

D:	16.0	± max
T:	6.0	± max
Lead Diameter	0.8	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	3.0	± max
B:	4.00	± nom
C:	3.80	± nom



**Electrical Specifications**

Resistance:	7.0	Ω	± 20 %
Max Steady State Current upto 65°C:	5.00	A	
Max Rec. Energy Rating:	60	J	
Actual Failure Instantaneous Energy:	120	J	
Maximum Capacitance @ 120 VAC:	4,167	µf	
Maximum Capacitance @ 240 VAC:	1,041	µf	
Resistance @ 100% Max Current:	0.09	Ω	
Resistance @ 50% Max Current:	0.17	Ω	
Body Temperature at 100% Max Current:	172.00	°c	
Dissipation Constant:	15.9	mw/°c	
Thermal Time Constant:	54	Sec.	
Material Type (for Beta and Curve):	G		


<b>SL15 7R005</b>	
Date: 04/08/2011	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A



ISO9001:2008 Certified

## Mechanical Specifications (mm)

D:	15.0	± .5
T:	4.5	± .2
Lead Diameter	0.8	± .1
S:	7.8	± 2.0
L:	38.0	± 9
Coating Lead Run Down (straight Leads)	5.0	± 1
B:	6.35	± .60
C:	2.82	± .5

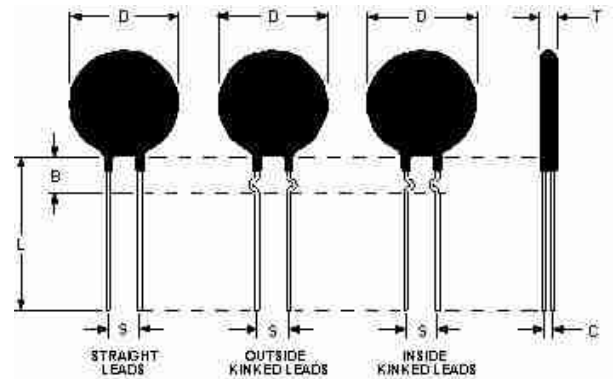

## Electrical Specifications

Resistance:	7.0 $\Omega$	± 20 %
Max Steady State Current upto 65°C:	5.00	A
Max Rec. Energy Rating:	60	J
Actual Failure Instantaneous Energy:	120	J
Resistance @ 100% Max Current:	0.09	$\Omega$
Resistance @ 50% Max Current:	0.17	$\Omega$
Body Temperature at 100% Max Current:	172.00	°c
Dissipation Constant:	15.9	mw/°c
Thermal Time Constant:	54	Sec.
Material Type (for Beta and Curve):	G	

### SL15 7R005

Date: 04/08/2011

Drawn by: Erin Landis

Ametherm, Inc.  
3111 N. Deer Run Road  
Carson City, Nevada USA 89701  
www.ametherm.com

Approved By: Mehdi Samii

Revision: A