

DC. Capacitor Dimension

DC. 陶瓷電容器 外型尺寸表

Rated Voltage (VDC)	Temp.char / capacitance range (pF)					Dimension (mm)		
	C NPO	S SL	B Y5P	D Y5T	E Y5U	D (max)	F	T (max)
10KV (4A)	10~22	33~68	101~151	101~221	221~331	8.0	9.5/12.5	8.0
	33	82	-	-	-	9.0	9.5/12.5	8.0
	47	101~151	181~221	331~471	471~681	10.0	9.5/12.5	9.0
	68	221	331~471	681	102	12.0	9.5/12.5	9.0
	101	-	681	102	152	14.0	9.5/12.5	9.0
	-	-	102	-	222	16.0	9.5/12.5	9.0
	-	-	-	-	332	20.0	9.5/12.5	9.0
12KV (4B)	10~15	33~47	-	-	-	8.0	9.5/12.5	9.0
	22	-	101	101~221	-	9.0	9.5/12.5	9.0
	33	68	151~221	331	221~471	10.0	9.5/12.5	9.0
	47	-	-	471	-	11.0	9.5/12.5	10.0
	-	82~101	331~471	-	681	12.0	9.5/12.5	10.0
	68	-	-	681	102	13.0	9.5/12.5	10.0
	-	151~221	681	-	-	14.0	9.5/12.5	10.0
	101	-	-	102	-	15.0	9.5/12.5	10.0
	-	-	102	-	152	16.0	9.5/12.5	10.0
15KV (4C)	10	22	-	101~181	221	9.0	9.5/12.5	10.0
	15	33	101~181	221~331	331	10.0	9.5/12.5	10.0
	-	47	-	-	-	11.0	9.5/12.5	10.0
	22	68	221~331	471	471~681	12.0	9.5/12.5	11.0
	-	82	-	681	751~821	13.0	9.5/12.5	11.0
	33	101	471	-	102	14.0	9.5/12.5	11.0
	47	-	-	102	-	15.0	9.5/12.5	11.0
	-	151	681	-	-	16.0	9.5/12.5	11.0
	68	-	102	152	152	18.0	9.5/12.5	11.0
20KV (4D)	10	22	-	101~181	221	9.0	9.5/12.5	12.0
	15	33	101	221	331	10.0	9.5/12.5	12.0
	22	47	151	331	-	11.0	9.5/12.5	12.0
	33	68	181~221	471	471~681	12.0	9.5/12.5	12.0
	-	-	331	-	751~821	13.0	9.5/12.5	12.0
	47	82~101	-	681	102	14.0	9.5/12.5	12.0
	-	-	471	-	-	15.0	9.5/12.5	12.0
	-	-	-	102	-	16.0	9.5/12.5	12.0
	68	-	681	-	152	18.0	9.5/12.5	12.0
101	-	102	-	222	20.0	9.5/12.5	12.0	

尺寸和公差 Dimensions and Tolerance

F = 9.5 or 10.0 or 12.5 ± 0.8 mm


B = 3.0 mm max for FS

d = 0.55 mm ± 0.05 mm

L = 3 ~ 33 mm.

以上為標準尺寸, 特殊規格要求請詢問確認

The size is usual goods, special Request to conferred on the Side.

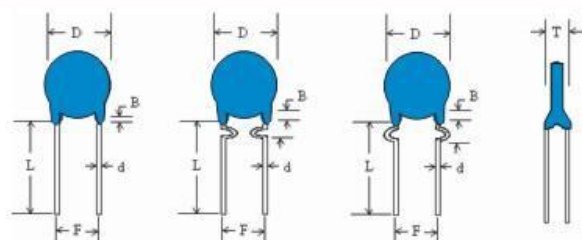


DC. Capacitor Dimension

DC. 陶瓷電容器 外型尺寸表

Rated Voltage (VDC)	Temp.char / capacitance range (pF)					Dimension (mm)		
	C NPO	S SL	B Y5P	E Y5U	F Y5V	D (max)	F	T (max)
3KV (3F)	0.5~5	5~51	101~391	-	102	6.5	7.5/9.5	5.0
	-	56~75	471	102~152	222	7.5	7.5/9.5	5.0
	-	82~101	681	-	-	8.5	7.5/9.5	5.0
	-	-	102	222	332	9.0	7.5/9.5	5.0
	-	-	-	-	472	9.5	7.5/9.5	5.0
	-	-	-	332~472	-	11.0	7.5/9.5	5.0
	-	-	-	-	103	14.5	7.5/9.5	5.0
4KV (3G)	0.5~5	5~51	101~331	471	102	6.5	7.5/9.5	5.0
	-	56~75	471~681	561~102	152~222	7.5	7.5/9.5	5.0
	-	82~101	102	-	332	9.0	7.5/9.5	5.0
	-	-	-	222	392~472	9.5	7.5/9.5	5.0
	-	-	-	332	-	11.0	7.5/9.5	5.0
	-	-	-	-	562~682	11.5	7.5/9.5	5.0
	-	-	-	472	-	13.0	7.5/9.5	5.0
6KV (3J)	0.5~5	10~82	101~151	471	102	7.0	7.5/9.5	6.0
	-	-	221~331	561~102	-	8.0	7.5/9.5	6.0
	-	-	-	-	152	8.5	7.5/9.5	6.0
	-	-	471~681	152	222	9.0	7.5/9.5	6.0
	-	-	-	222	332	11.0	7.5/9.5	6.0
	-	-	102	332	392~472	12.0	7.5/9.5	6.0
	-	-	-	472	-	15.0	7.5/9.5	6.0
8KV (3F)	3~10	10~27	101~151	-	-	8.0	9.5/12.5	7.0
	-	-	221~271	471~561	102	9.0	9.5/12.5	7.0
	10~18	33~47	331~391	681~102	122~152	10.0	9.5/12.5	7.0
	22~33	56~82	471~561	122	182~272	12.0	9.5/12.5	7.0
	-	-	681	-	-	13.0	9.5/12.5	7.0
	39~47	101~121	821~102	152~182	332~392	14.0	9.5/12.5	7.0
	56	151	-	222	472	16.0	9.5/12.5	7.0
	68	-	-	272~332	562~682	18.0	9.5/12.5	7.0
	-	-	-	392	-	20.0	9.5/12.5	7.0
-	-	-	472	-	22.0	9.5/12.5	7.0	

■ 尺寸和公差 Dimensions and Tolerance
 F = 7.5 or 9.5 or 10.0 or 12.5 ± 0.8 mm
 B = 3.0 mm max for FS
 d = 0.55 mm ± 0.05 mm
 L = 3 ~ 33 mm.

■ 以上為標準尺寸,特殊規格要求請詢問確認
 ■ The size is usual goods, special Request to conferred on the Side.

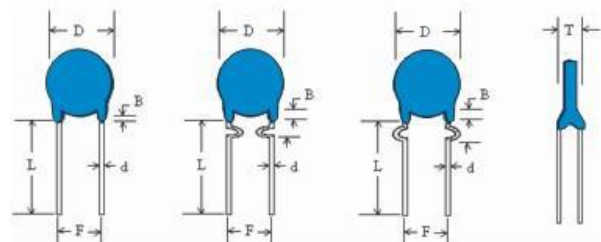

DC. Capacitor Dimension

DC. 陶瓷電容器 外型尺寸表

Rated Voltage (VDC)	Temp.char / capacitance range (pF)					Dimension (mm)		
	C NPO	S SL	B Y5P	E Y5U	F Y5V	D (max)	F	T (max)
50V (1H)	0.5~56	62~201	101~222	102~682	102~104	5.5	2.5/5.0	3.0
	62~82	-	332~472	-	104	6.5	2.5/5.0	3.0
	85~151	221~391	-	822~103	104~224	7.0	2.5/5.0	3.0
	181~221	471~561	682	-	-	9.0	2.5/5.0	3.0
	271~331	681~821	822~103	-	-	10.0	2.5/5.0	3.0
	-	102	104	-	-	12.0	2.5/5.0	3.0
500V (2H)	0.5~33	47~121	101~561	-	102~332	5.5	2.5/5.0	3.0
	36~56	151	681~102	102~222	-	6.0	2.5/5.0	3.0
	-	181	152	272~392	392~562	7.0	2.5/5.0	3.0
	68~82	221~271	182~222	472~562	682	8.0	2.5/5.0	3.0
	101	-	272	682	-	8.5	2.5/5.0	3.0
	-	331~391	-	-	822~103	9.0	2.5/5.0	3.0
	-	-	332~392	-	-	9.5	2.5/5.0	3.0
	-	471	-	822~103	203~223	10.5	2.5/5.0	3.0
	-	-	472	-	-	11.0	2.5/5.0	3.0
	-	-	682	-	-	12.5	2.5/5.0	3.0
1KV (3A)	0.5~27	47~68	101~681	102~122	102~272	6.0	5.0/7.5	4.0
	33~47	82~101	821~102	152~222	332~472	7.0	5.0/7.5	4.0
	-	151~181	122~152	302~332	-	7.5	5.0/7.5	4.0
	56~101	221	-	392	562~682	8.0	5.0/7.5	4.0
	-	221~391	182~222	472	822~103	9.0	5.0/7.5	4.0
	-	471	-	502~562	103	9.5	5.0/7.5	4.0
	-	-	302~392	-	-	11.0	5.0/7.5	4.0
	-	-	472	822~103	-	12.0	5.0/7.5	4.0
	-	-	682	-	203~333	14.5	5.0/7.5	4.0
	-	-	103	-	473	17.5	5.0/7.5	4.0
2KV (3D)	0.5~22	30~56	101~471	-	102~222	6.0	5.0/7.5	4.0
	27	-	-	102~152	-	6.5	5.0/7.5	4.0
	30~47	68	561~681	-	222~332	7.0	5.0/7.5	4.0
	-	-	821~102	-	-	7.5	5.0/7.5	4.0
	-	82~101	-	222	392	8.0	5.0/7.5	4.0
	-	121~151	-	332	472	9.0	5.0/7.5	4.0
	-	221	222	472	562~682	10.0	5.0/7.5	4.0
	-	271~391	-	562	822~103	11.0	5.0/7.5	4.0
	-	471	332	103	-	14.0	5.0/7.5	4.0
-	-	472	-	223	16.0	5.0/7.5	4.0	

尺寸和公差 Dimensions and Tolerance

F = 2.5 or 5.0 or 6.35 or 7.5 ± 0.8 mm

B = 3.0 mm max for FS

d = 0.55 mm ± 0.05 mm

L = 3 ~ 33 mm.

■ 以上為標準尺寸, 特殊規格要求請詢問確認

■ The size is usual goods, special Request to conferred on the Side.

