



Series MIN840

High Accuracy Miniature Tension or Compression Load Cell



Description

The Series MIN840 load cells are 0.15% accuracy force transducers designed for tension and/or compression applications requiring a compact-sized configuration. Constructed of welded stainless steel, these bonded foil strain gaged force sensors provide reliable performance for a wide range of demanding application environments. The MIN840 comes in a variety of mounting configurations. With additional height dimensions, these units come with internal modules which provide high level analog or digital outputs. Additional features include shock and vibration protection. MIN840 load cells are ideal for applications in component testing, shop floor automation, and robotics. Each unit is shipped with a 5 point calibration record traceable to NIST as standard.

Standard Features

- 0.15% Accuracy
- Compact Size
- Tension and Compression
- 2 mV/V nominal
- Welded Stainless Steel
- -40°F to 250°F Standard Temperature
- Shock and Vibration Resistant
- 5 Point Calibration Record Traceable to NIST



Optional Features

- Multiple Mounting Configurations
- Metric Versions
- Analog (4-20 mA, 0-5 Vdc, 0-10 Vdc) and Digital (RS232, RS485, MODbus, CANbus) outputs
- Special Calibration
- Customer Specified Cable Lengths
- -40°F to +400°F Operating Temperature

Performance

Standard Ranges

250, 500, 1000, 2500, 5000 lbs.

Output

2mV/V nominal.

Accuracy

0.15% FSO BFSL.

Temperature Effect on Zero

0.005% FSO/°F.

Temperature Effect on Span

0.005% Reading/°F.

Zero Balance

1% FSO.

Environmental Characteristics

Operating Temperature Range

-40°F to 250°F.

(-40°F to 400°F optional.)

Compensated Temperature Range


70°F to 170°F.

(-40°F to 400°F optional.)

Series MIN840

Specifications

Baseline Configuration Specs Represented.
Modifications Encouraged - See Below
Custom Designs Available

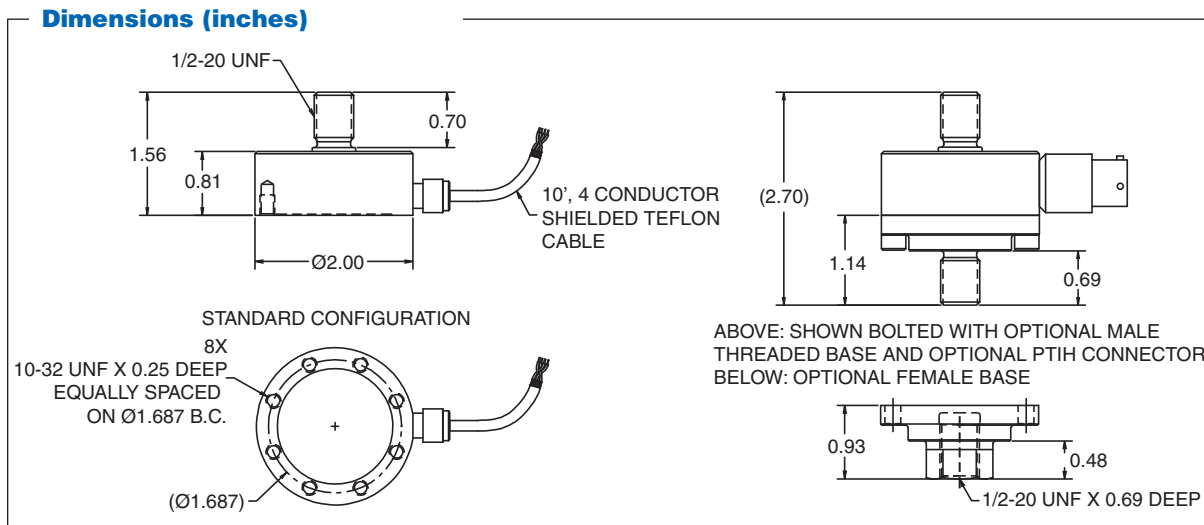

Mechanical Characteristics

Threads

1/2-20 UNF.

Static Overload Without Damage

150% Range.

Standard Calibration

Tension only:

5 points

(0, 50%, 100%, 50%, 0 of Range).

Optional Calibrations

• Compression only:

5 points (No charge option)

• Tension and Compression:

5 points in each direction

• Special multipoint calibration

(customer specified):

in tension or compression or both tension and compression.

Material

Welded stainless steel.

Electrical Characteristics

Bridge Resistance

350 Ohms nominal.

Excitation

10 Vdc or Vac.

Insulation Resistance

Greater than 5000 megaohms at 50 Vdc.

Electrical Termination

10', 4 Conductor Shielded Teflon Cable.

Electrical Characteristics

Connector Pins (Standard)

RED	+EXE	GREEN	+SIG
BLACK	- EXE	WHITE	- SIG

Customer specified wiring codes are available.



Modifications and Warranty

MODIFICATIONS: We realize transducer applications vary greatly and as such our designs are flexible. Choice of pressure port, electrical termination, material compatibility and performance characteristics are a few of the many options available. Specifications on this datasheet represent the standard configuration only. Product and company names listed are trademarks of their respective companies. Specifications subject to change without notice.

WARRANTY: Stellar Technology warrants that its product shall be free from defective workmanship and/or material for a twelve month period from the date of shipment, provided that Stellar Technology's obligation hereunder shall be limited to correcting any defective material FOB our factory. No allowance will be made for any expenses incurred for correcting any defective workmanship and/or material without written consent by Stellar Technology. This warranty is in lieu of all other warranties expressed or implied.



ISO 9001/AS9100

Due to the nature of technology, changes are inevitable. For latest technical specifications, see our website.

237 Commerce Drive • Amherst, NY 14228 • USA

Tel: 716.250.1900 • Fax: 716.250.1909

Web: stellartech.com • Email: info@stellartech.com

Copyright © 2015 STI • All Rights Reserved
Datasheet P/N: 226404G DCN 13043